
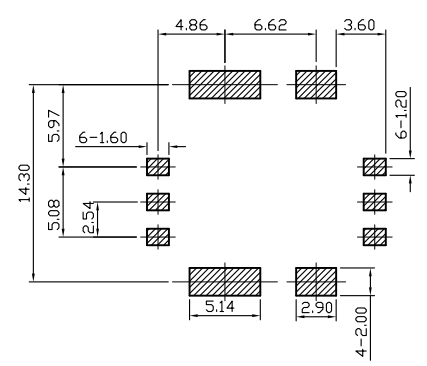
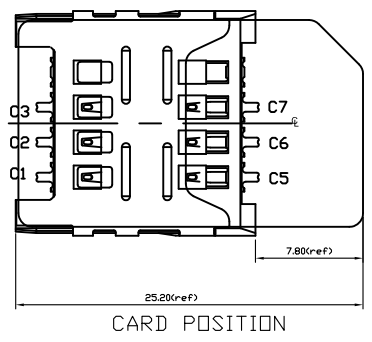



PIN NO	Description
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved



RECOMMENDED PCB LAYOUT
(GENERAL TOLERANCE:±0.05)

- NOTES :
- MATERIAL:
 - HOUSING: LCP UL 94V-0;
 - SHELL: STAINLESS STEEL
 - TERMINAL: COPPER ALLOY
 - ELECTRICAL PERFORMANCES :
 - CURRENT RATING :0.5A Max;
 - VOLTAGE RATING :30 V AC;
 - INSULATION RESISTANCE :100 MEGA OHMS MIN;
 - DIELECTRIC WITHSTANDING VOLTAGE:250V AC FOR 1 MINUTE;
 - CONTACT RESISTANCE :40 MILLI OHMS MAX ;
 - MECHANICAL PERFORMANCES :
 - DUABILITY :5000 CYCLES;
 - CONTACT NORMAL FORCE:75±25gf per pin (0.10mm from molding surface)
 - OPERATING TEMPERATURE :-40°C TO +85°C;
 - STORAGE TEMPERATURE:-40°C TO +85°C;

	深圳市鑫南天科技有限公司 Shenzhen XinNanTian Technology Co., Ltd			
	DIMENSIONS INIT: mm UNLESS OTHERWISE SPECIFIABLE DIMENSION TOLERANCE X.X: ± 0.38 X.XX: ± 0.25 X.XXX: ± 0.10 ANGULAR: ± 1°	PRODUCT NAME : SIM connector 1.50H PRODUCT NO. : XNT-6150006-015Y DRAWING NO. : XNT-6150006-015Y	DRAWING: COCO CHECK: AG APPROVED: JEFF	DATE: 2017/03/17 DATE: 2017/03/17 DATE: 2017/03/17
SCALE: NA DWG ID: P D REV.: A1 PAGE: 1 OF 1				

A1	ECR2017031701	Add storage temperature and contact normal force	Coco	20170317
REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE