


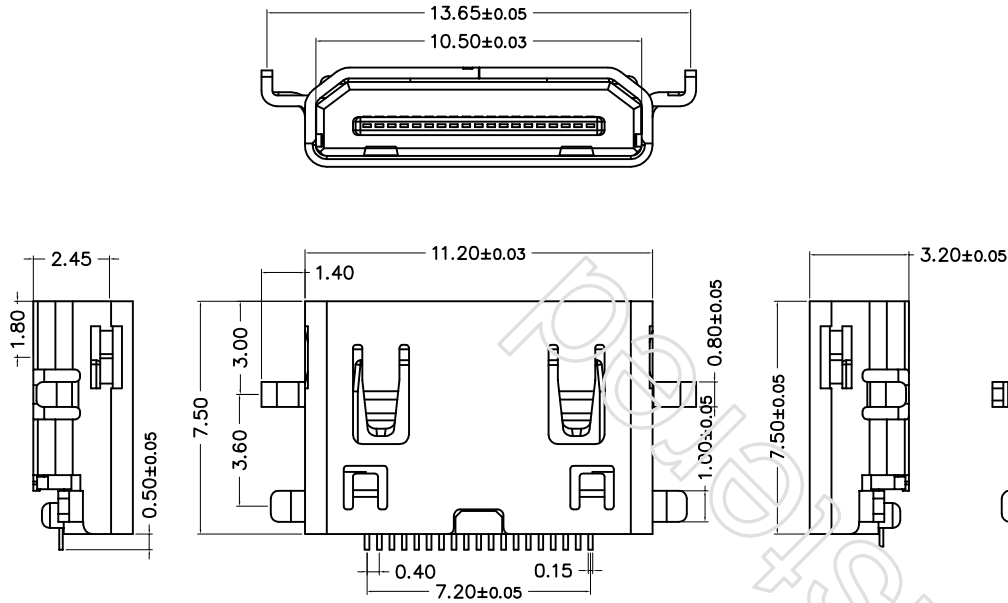


* 所有原料材质, 生产制程, 电镀必须符合ROHS要求

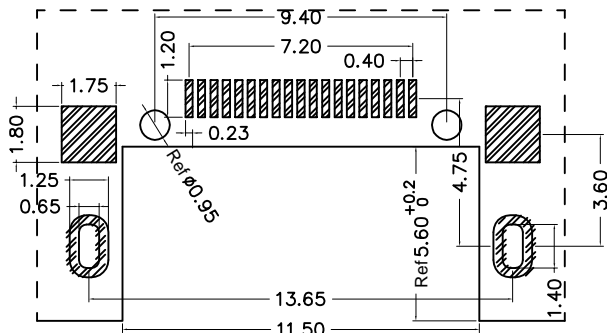

3D VIEW

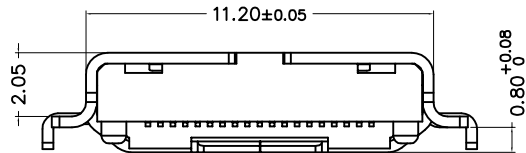

- SPECIFICATION:
- 1.MATING FORCE:44.1N MAX
 - 2.UNMATING FORCE:7-25N
 - 3.DURABILITY: 5000 CYCLES MIN
 - 4.CURRENT:0.5A
 - 5.VOLTAGE:40V MAX
 - 6.WITHSTANDING VOLTAGE:500V AC MIN.(UNMATED)
 - 7.CONTACT RESISTANCE:30MN MAX.
 - 8.INSULATION RESISTANCE:100MN /MIN.(UNMATED)
 - 9.OPERATING TEMPERATURE RANGE:-20.C TO +85.C
 - 10.ALL THE MATERIAL SHOULD COMPLY WITH THE ROHS REQUIREMENT.

Type C pin	Signal Name
1	TMDS Data2_Shield
2	TMDS Data2+
3	TMDS Data2-
4	TMDS Data1_Shield
5	TMDS Data1+
6	TMDS Data1-
7	TMDS Data0_Shield
8	TMDS Data0+
9	TMDS Data0-
10	TMDS Clock_Shield
11	TMDS Clock+
12	TMDS Clock-
13	DDC/CEC Ground
14	CEC
15	SCL
16	SDA
17	Utility
18	+5V Power
19	Hot Plug Detect



深圳市鑫南天科技有限公司

Shen zhen Shi Xin Nan Tian Industrial Co., Ltd

DIMENSIONS INIT: mm UNLESS OTHERWISE SPECIFIABLE	PRODUCT NAME :	DRAWING:	DATE:
	MINI-HDMI 19Pin C TYPE沉板0.80 (鑫南天版本6)	COCO	2009/12/10
DIMENSION TOLERANCE X.X: ± 0.25 X.XX: ± 0.10 X.XXX: ± 0.05 ANGULAR: ± 1°	PRODUCT NO. :	CHECK:	DATE:
	0101AAAG19Q8	JANY	2009/12/10
	DRAWING NO. :	APPROVED:	DATE:
	XNT-009	JEFF	2009/12/10
		SCALE:	DWG ID: REV.: PAGE:
		1:1	P D A 1 of 1

REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE
1				
2				