




RECOMME DED P.C.B LAYOUT  
COMPOENT SIDE(TOLERANCE ±5)

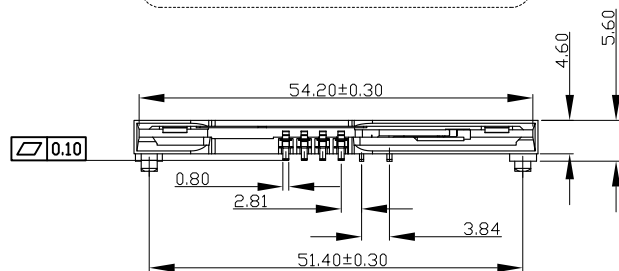

ELECTRIC FUNCTION	DETECT SWITCH
WITHOUT CARD	OPEN
CARD INSERTRD	CLOSED

Notes:  
Material: Terminal: Copper alloy  
Housing: Lcp UL 94V-0 Black

FINISH : Selective 3U" Au on contact area  
Specifications:  
Voltage Current Rating: 1A, 50V AC  
Insulation Resistance: 1000Mohm Min  
Contact Withstanding Voltage:  
AC 500V For 1 Minute  
Temperture Rating: -40° To +85°  
Durability: 50000 Cycles Min  
Manual soldering:370°C 3Sec Max  
Weight:6.47±0.5g

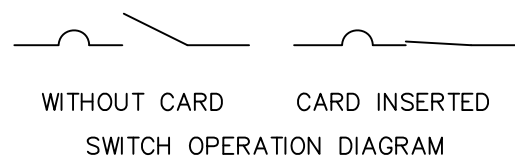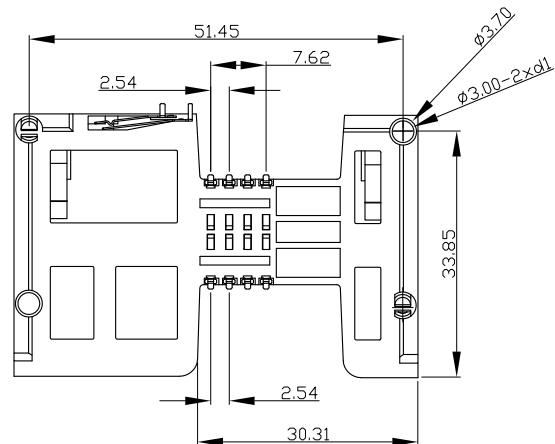

REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE
1				
2				
3				

	<b>深圳市鑫南天科技有限公司</b> Shenzhen XinNanTian Technology Co., Ltd				
	DIMENSIONS INIT: mm UNLESS OTHERWISE SPECIFIABLE	PRODUCT NAME : Smart card connector	DRAWING: COCO	DATE: 2014/01/15	
	DIMENSION TOLERANCE X.X: ± 0.38 X.XX: ± 0.25 X.XXX: ± 0.10 ANGULAR: ± 1°	PRODUCT NO. : XNT-SC-806-08560	CHECK: AG	DATE: 2014/01/15	
		DRAWING NO. : XNT-SC-806-08560	APPROVED: JEFF	DATE: 2014/01/15	
		SCALE: NA	DWG' ID: P D	REV.: A	PAGE: 1 OF 2