
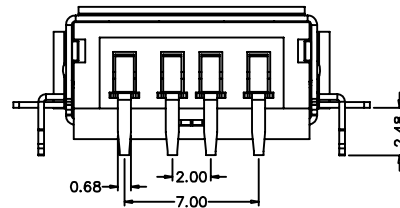
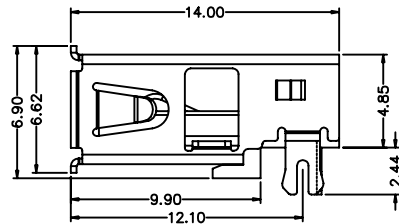
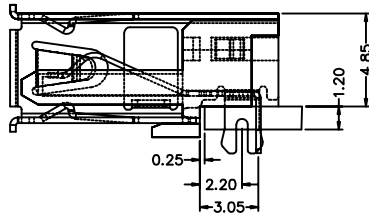
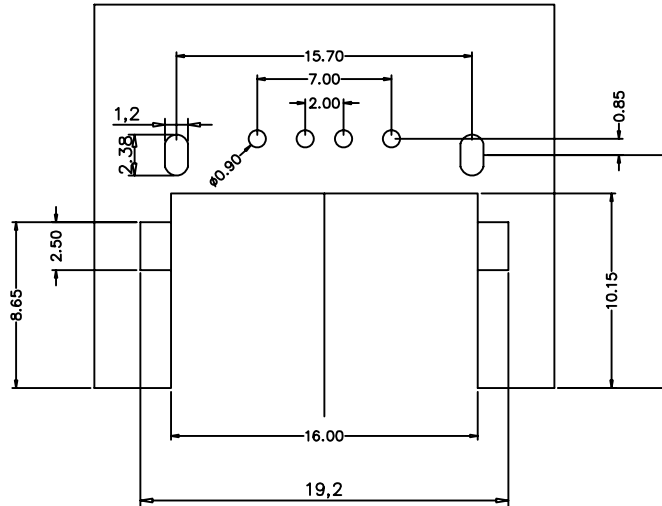
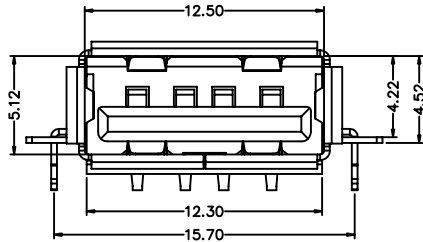



* 所有原料材质, 生产制程, 电镀必须符合ROHS要求

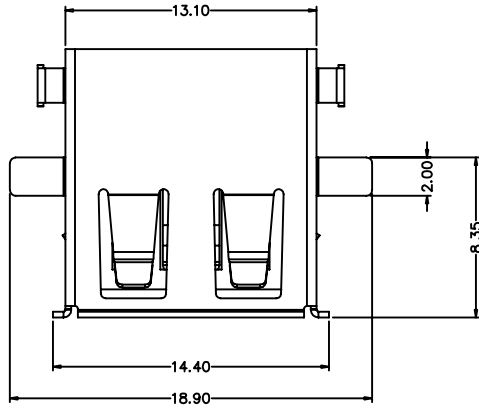

规格说明: Specifications:

电气特性: Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.75kgf (MAX)
Unmate force: 1.02kgf (MIN)
2. 端子保持力: Terminal Retention
1.2kgf (MIN)

原材料: Material:

1. 塑胶: Housing:
High Temperature Thermoplastics,
UL 94V-0 PBT/LCP White/Black
2. 端子: Contact: Copper Alloy C2680
3. 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
2. 外壳: Shell:
Nickel Plating




深圳市鑫南天科技有限公司

Shen zhen Shi Xin Nan Tian Industrial Co., Ltd

DIMENSIONS INIT: mm	
UNLESS OTHERWISE SPECIFIABLE	
DIMENSION	TOLERANCE
X.X: ±	0.25
X.XX: ±	0.2
X.XXX: ±	0.1
ANGULAR: ±	1°

PRODUCT NAME : USB A TYPE 4PIN 前贴后插 沉板上4.9有卷边	DRAWING: COCO	DATE: 2008/08/08
PRODUCT NO. : USBA4PCBBS49JK	CHECK: JANY	DATE: 2008/08/08
DRAWING NO. : XNT-USB49JK	APPROVED: JEFF	DATE: 2008/08/08



SCALE: 1:1	DWG ID: P D	REV.: B	PAGE: 1 of 1
----------------------	----------------	-------------------	-----------------

REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE
1				
2				