

REV.	Q'TY	ECN. NO.	APR.	DATE
A				

NOTES:


MATERIALS

- HOUSING:  
HI-TEMP.PLASTIC UL 94V-0 BLACK
- CONTACT  
COPPER ALLOY, T=0.15mm  
GOLD PLATED ON CONTACT AREA  
GOLD FLASH PLATED ON SOLDER TAILS UNDER NICKEL PLATED
- SHELL:  
STAINLESS STEEL OR COPPER ALLOY T=0.25mm  
MATTE TIN PLATING OVERALL UNDER NICKEL PLATED

SPECIFICATIONS

- VOLTAGE RATING: 30V AC
- CURRENT RATING: WHEN APPLYING CURRENT ONLY TO SIGNAL TERMINALS:  
1.0A (FOR TERMINAL NO. 2, 3 AND 4)  
WHEN APPLYING CURRENT ONLY TO POWER TERMINALS:  
1.8A (FOR TERMINAL NO. 1 AND 5)  
0.5A (FOR TERMINAL NO. 2, 3 AND 4)
- INSULATION RESISTANCE: 100M MINIAT 100V DC
- DIELECTRIC WITHSTANDING VOLTAGE: 100V (r.m.s) AC FOR 1 MINUTE
- CONTACT RESISTANCE: 30m MAX.
- OPERATING TEMPERATURE: -30 TO +80?

4) PART No.: USBF-P0565-H25-0330

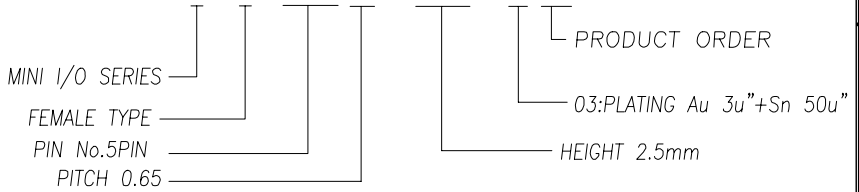

DIMENSION IN mm		深圳市鑫南天科技有限公司 Shen zhen Shi Xin Nan Tian Industrial Co.,Ltd		
TOLERANCE UNLESS OTHERWISE SPECIFIED		APR. JAMES 02/08/09	TITLE: MICRO USB 5PIN RECEPTACLE 沉板1.0 DIP9.45	
.X ± 0.35	.X' ± 5'	CHK.	DWG NO. USBF-P0565-H25-0330	
.XX ± 0.25	.X' ± 3'	DRA. SAMLI 02/08/09	PROJ.	CUSTOMER DRAWING
.XXX ± 0.15	.XX' ± 1'	SIZE A4	SCALE 5:1	SHEET 1/1 REV. A