


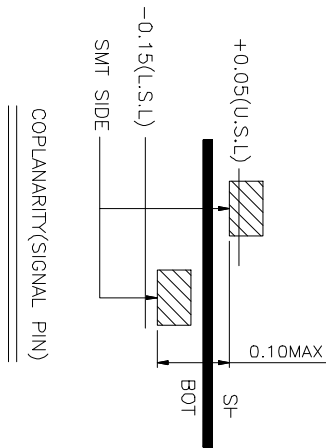
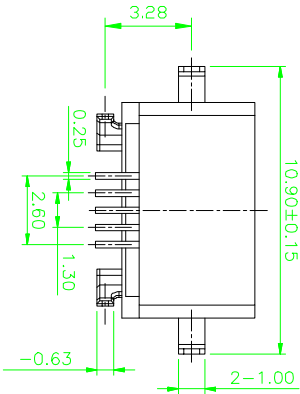




RECOMMENDED P.C.B LAYOUT  
GENERAL TOLERANCE ±0.05

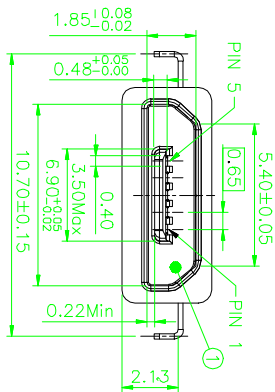

\* ROHS COMPLIANT



NOTES:

- MATERIAL:
  - HOUSING:THERMOPLASTIC,UJ94V-0,COLOR:BLACK;
  - HOUSING:THERMOPLASTIC,UJ94V-0,COLOR:BLACK;
  - CONTACT: COPPER ALLOY T=0.15MM;
  - SHELL:STAINLESS STEEL T=0.20mm
- FINISH:
  - CONTACT:GOLD FLASH PLATING ON CONTACT AREA 50u"MIN. Ni UNDERPLATING OVERALL;
  - SHELL: MATTE PURE Sn 50u" MIN OVERALL, Ni 50u" Min UNDERPLATING;
- SPECIFICATIONS:
  - VOLTAGE RATING: 100V AC
  - CURRENT RATING: PIN1/PIN5 3.0A  
PIN2/PIN3/PIN4 1.0A
  - INSULATION RESISTANCE:100MEG.OHM MAX
  - CONTACT RESISTANCE: 50 MILL.OHM MAX
  - OPERATION TEMPERATURE:-20TO+65°
  - INSERT FORCE: 35N MAX
  - EXTRACT FORCE:8N MIN
  - DURABILITY:5000 CYCLES

④	SHELL	1	STAINLESS STEEL
③	CONTACT	1	COPPER ALLOY
②	HOUSING	5	THERMOPLASTIC
①	HOUSING	1	THERMOPLASTIC
NO	PART NAME	QTY	MATERIAL
			REMARK

深圳市鑫南天科技有限公司  
Shenzhen XinNanTian Technology Co., Ltd



DIMENSIONS UNIT: mm  
UNLESS OTHERWISE SPECIFIABLE

DIMENSION	TOLERANCE
X.X ±	0.36
X.XX ±	0.25
X.XXX ±	0.10
ANGULAR: ±	1°

PRODUCT NAME: MICRO USB SPIN 版本: 1

PRODUCT NO.: XNT-MB1005-002120-110

DRAWING NO.: XNT-026

CHECK: AG

DATE: 2014/01/15

APPROVED: JEFF

DATE: 2014/01/15

SCALE: NA

DWG ID: P D

REV: A

PAGE: 1 OF 1

REVISION NO.

ECR NO.

DESCRIPTION

MARK

DATE

4

5

6

F

E

D

C

B

A

1

2

3

4

5

6