


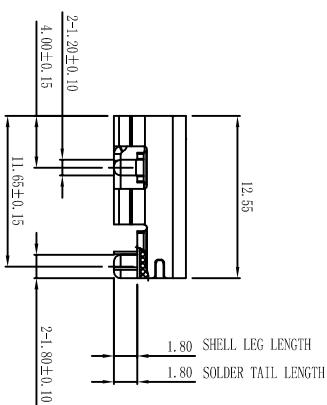
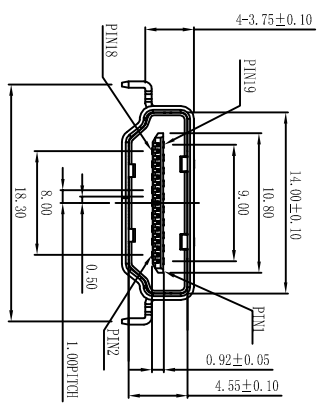
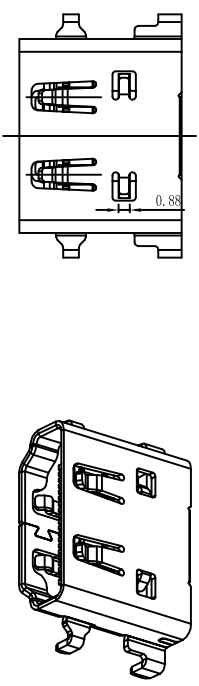


* ROHS Compliant

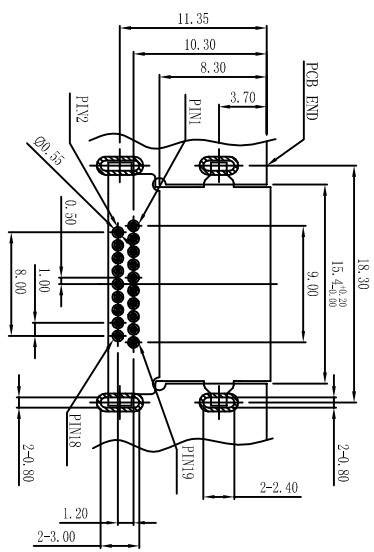

DETAIL A
SCALE 5:1

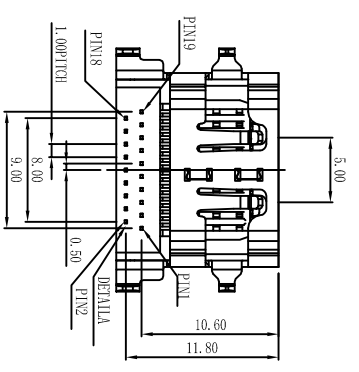

RECOMMEND PCB LAYOUT
TOLERANCE: ±0.05
TOP VIEW

MATERIALS

1. HOUSING : THERMOPLASTIC (UL 94V-0).
2. TERMINAL : COPPER ALLOY, GOLD PLATED ON CONTACT AREA, Δ GOLD PLATED ON SOLDER TAIL.
3. SHELL : COPPER ALLOY, NICKEL PLATED OVERALL

SPECIFICATION

1. CURRENT RATING : 0.5 A. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R. M. S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 100M MIN (UNMATED) AT 500V DC.
4. CONTACT RESISTANCE : 30m Ω MAX.
5. OPERATING TEMPERATURE : -25° C TO +85° C.

DESCRIPTION OF PLATING ON TERMINALS			
NO.	EXPLAIN	NO.	EXPLAIN
0	GOLD FLASH	3	GOLD 15u''
1	GOLD 5u''	4	GOLD 20u''
2	GOLD 10u''	6	GOLD 30u''

PIN	SIGNAL ASSIGNMENT	PIN	SIGNAL ASSIGNMENT
1	TMS DATA2-	8	TMS DATA SHIELD
2	TMS DATA2 SHIELD	9	TMS DATA-
3	TMS DATA2-	10	TMS CLOCK-
4	TMS DATA1+	11	TMS CLOCK SHIELD
5	TMS DATA1 SHIELD	12	TMS CLOCK-
6	TMS DATA1-	13	CEC
7	TMS DATA0	14	RESERVED (N.C. ON DEVICES)



深圳市鑫南天科技有限公司
Shen Zhen Xin Nan Tian Technology Co., Ltd

DIMENSIONS INT: mm		DRAWING: COCO	
UNLESS OTHERWISE SPECIFIABLE		DATE: 2015/09/01	
DIMENSION TOLERANCE		CHECK: JANY	
.0±0.25		DATE: 2015/09/01	
.00±0.15		APPROVED: JEFF	
.000±0.05		SCALE: 1:1	
ANG. ±3°		DWG TO: P D	
		REV: A	
		PAGE: 1 of 1	

1 2 3 4 5 6