


NOTE:
 1.MATERIAL:
 1-1.HOUSING:THERMOPLASTIC UL94V-0 BLACK
 1-2.CONTAT: COPPER ALLOY T=0.12mm
 1-3.SHELL: STAINLESS STEEL T=0.12mm
 1.MECHANICAL PERFORMANCE:
 1-1.INSERT FORCE: 10N Max;
 REMOVE FORCE: 1N Min
 1-2.DURABILITY: 1000 TIMES
 2.ELECTRICAL PERFORMANCE:
 2-1.CR: BEFORE TEST 80mΩ Max,
 AFTER TEST 120mΩ Max
 2-2.IR: 1000MΩ
 2-3.DIELECTRIC WITHSTANDING VOLTAGE:
 500V/AC 1 MIN

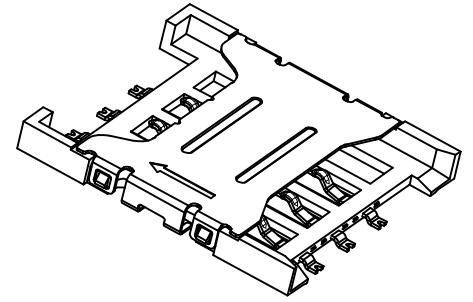

REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE
1				
2				
3				

	深圳市鑫南天科技有限公司 Shenzhen XinNanTian Technology Co., Ltd			
	DIMENSIONS INIT: mm UNLESS OTHERWISE SPECIFIABLE DIMENSION TOLERANCE X.X: ± 0.38 X.XX: ± 0.25 X.XXX: ± 0.10 ANGULAR: ± 1°	PRODUCT NAME : micro SIM 1.50 PUSH PULL	DRAWING: COCO	DATE: 2014/01/15
	PRODUCT NO. : XNT-MSIM-AF150	CHECK: AG	DATE: 2014/01/15	
	DRAWING NO. : XNT-MSIM-AF150	APPROVED: JEFF	DATE: 2014/01/15	
		SCALE: NA	DWG ID: P D	
		REV.: A	PAGE: 1 OF 1	