
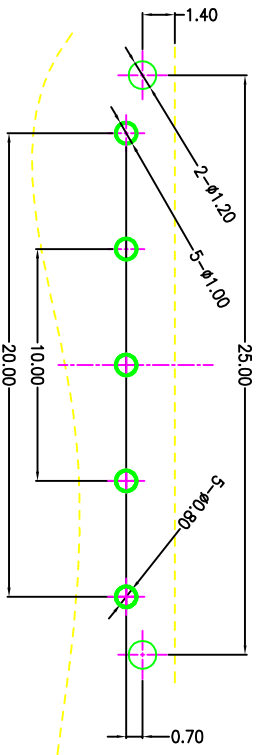
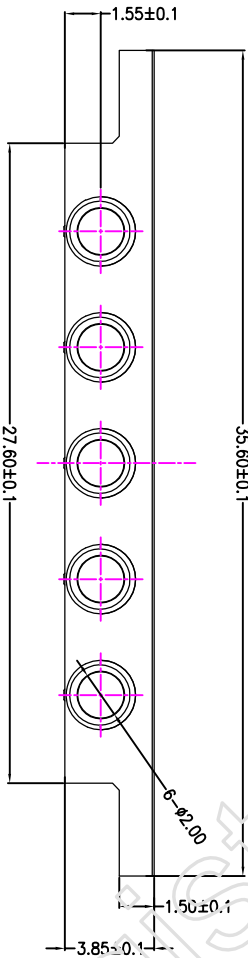




\* 所有原材料, 生产制程, 电镀必须符合ROHS要求

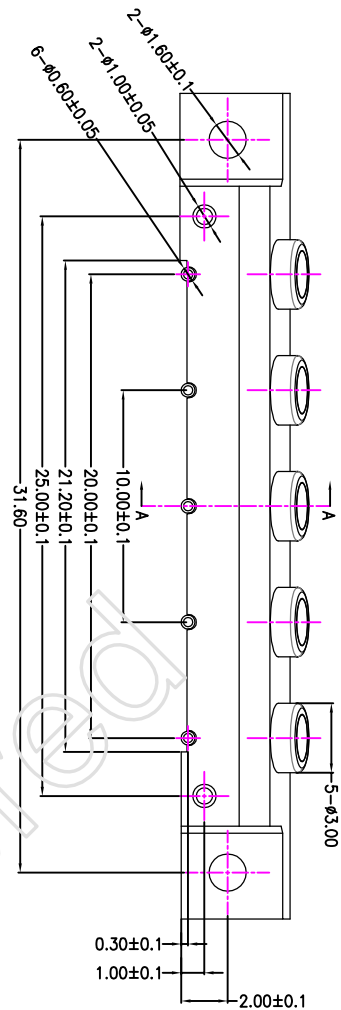

THIS DRAWING IS CONTROLLED DOCUMENT FOR COTEX LTD. IT IS SUBJECT TO CHANGE THAT THE ENG. CONTROL ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION.

由 Autodesk 教育版产品制作

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN COTEX LTD. PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM NTK LTD.

REVISION NO.	EGR. NO.	DESCRIPTION	MARK	DATE
A		新发行		2017/11/11
1				
2				
3				



深圳市鑫南天科技有限公司  
Shen zhen Xin Nan Tian Technology Co., Ltd

DIMENSIONS IN: mm  
UNLESS OTHERWISE SPECIFIABLE

ANGULAR: ±  
X.XX: ±  
X.XXX: ±  
X.XXXX: ±

TOLERANCE  
0.25  
0.15  
0.10  
1°

MATERIAL:

Insulator: High Temperature Thermoplastic,  
UL 94V-0.

Contact: Copper Alloy

PLATING:

Contact: Plated 50u' Ni over all

Plated 1u' Au flash over all

Electrical:

Current Rating: 1.0A AC/DC max.

Voltage Rating: 12V AC/DC

Ambient Temperature Range: -20°C~+60°C

Ambient Humidity Range: 95% R.H. max.

Contact Resistance: 100mΩmax

Insulation Resistance: 100MΩmax.

Durability: 5000 cycles

PRODUCT NAME: 5.0P0 60 PIN 57端子 新接触 H3.15

PRODUCT NO.: XNT-PW81-0562BR

DRAWING NO.: XNT-D-PW81-0562BR

DRAWING NO.:	SCALE:	DWG. ID.:	REV.:	PAGE:
XNT-D-PW81-0562BR		PD	A	1 of 1

DRAWING: 0000

CHECK: JMW

APPROVED: 核心#

DATE:	DATE:	DATE:
2016/6/10	2016/6/11	2016/6/11